


# Genius Roof Solutions™

revolutionising roofs™

The **Hallhook™** - a hidden permanent slate fixing

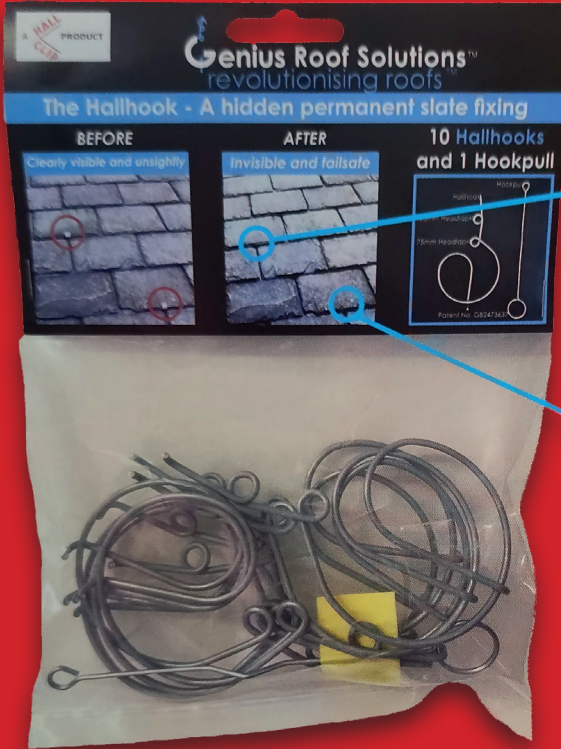

- Do away with unsightly lead straps which give the impression that the roof is unsafe and prone to further problems. Older buildings can look quaint. Lead straps in the roof make it look dilapidated.
- Failsafe - properly installed cannot fail.
- No comeback - once installed, forget about them. No cost of return visit to repair. Silicone is not a tradesman's repair.
- Client will be more than happy to pay for improved appearance of property.

From the inventor of the **HALLCLIP**

Visit the web: [www.geniusroofsolutions.com](http://www.geniusroofsolutions.com)

for further details and a demonstration video

**HALL  
CLIP™**


## 3 EASY STEPS



Remove the broken slate.




Position **Hallhook™** between slates so that bottom hook is 10mm above finished slate baseline and fix with nail. Hang hook pull on **Hallhook™**.

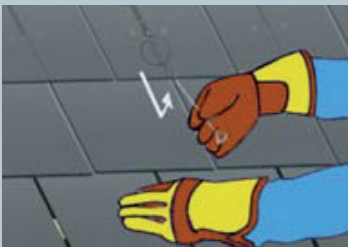

Slide new slate into place. Then gently pull the hook pull until the **Hallhook™** hooks the base of the slate. Remove hook pull. **Do not over stretch.**

## HOW IT WORKS

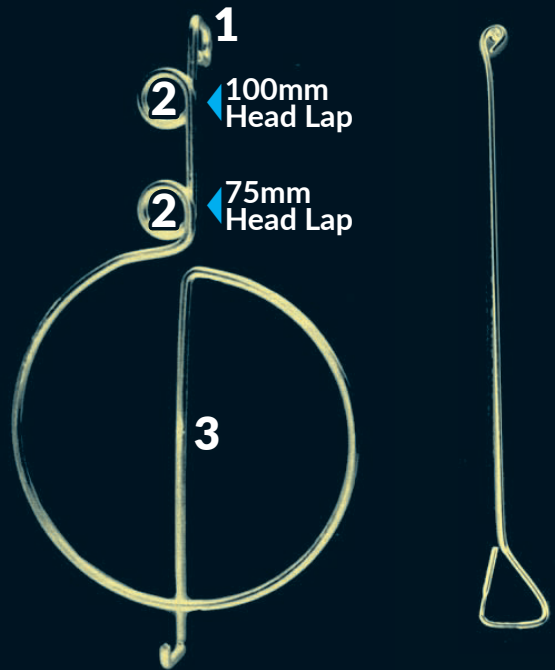

1. Fits between slates. Once nail fixing is applied at **2**. This provides a vertical line to **3**. Prevents lateral movement.
2. Two nail fixings are offered. The nail fixing to be used is dependent on size of slate head lap.
3. Upward biased spring that remains in contact with the underside of the object slate whilst disappearing between the two slates underneath. The underside contact prevents the hook pull slipping off the **Hallhook™**.

### THIS DEVICE IS FOR USE WHEN REPLACING A BROKEN SLATE

Replace a roof slate with **Hallhook™**:

- For general repair
- After solar panel bracket mounting
- After roof light/window installation
- After installing slate vents
- Conservation and heritage buildings